

PUNTE SPECIALI PER FORI CIECHI

HW SPECIAL HIGH PERFORMANCE DOWELL DRILL BITS

Shank D.10 mm. with flat and adjusting screw. PTFE antiseizure coating. Black colour for right rotation -orange colour for left rotation.


302A

Codice HW - RH	Codice HW -LH	D. mm.	L. mm.	Lu mm.	S x A mm.
302.05 AR	302.05 AL	5	57.5	27	10x27
302.06 AR	302.06 AL	6	57.5	27	10x27
302.08 AR	302.08 AL	8	57.5	27	10x27
302.10 AR	302.10 AL	10	57.5	27	10x27
302.12 AR	302.12 AL	12	57.5	27	10x27



302B

Codice HW - RH	Codice HW -LH	D. mm.	L. mm.	Lu mm.	S x A mm.
302.05 BR	302.05 BL	5	70	35	10x30
302.06 BR	302.06 BL	6	70	35	10x30
302.08 BR	302.08 BL	8	70	35	10x30
302.10 BR	302.10 BL	10	70	35	10x30
302.12 BR	302.12 BL	12	70	35	10x30

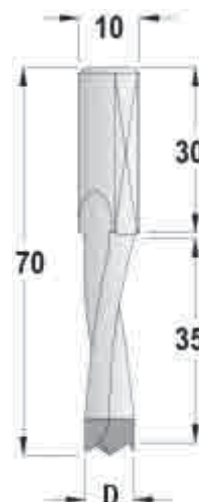

Gambo D.10 mm. con piano e vite di regolazione. Teflonatura di colore nero per rotazione destra e colore arancio per rotazione sinistra.