


PUNTE PER FORI CIECHI

HW SPECIAL DOWELL DRILL BITS

Shank D.10 mm. with flat and adjusting screw.PTFE antiseizure coating.Special chip free negative spurs action. Black colour for right rotation -orange colour for left rotation.


309B

Codice HW - RH	Codice HW -LH	D. mm.	L. mm.	Lu mm.	S x A mm.
309.04BR	309.04BL	4	57.5	27	10x27
309.05BR	309.05BL	5	57.5	27	10x27
309.06BR	309.06BL	6	57.5	27	10x27
309.63BR	309.63BL	6.35	57.5	27	10x27
309.07BR	309.07BL	7	57.5	27	10x27
309.08BR	309.08BL	8	57.5	27	10x27
309.09BR	309.09BL	9	57.5	27	10x27
309.95BR	309.95BL	9.5	57.5	27	10x27
309.10BR	309.10BL	10	57.5	27	10x27
309.11BR	309.11BL	11	57.5	27	10x27
309.12BR	309.12BL	12	57.5	27	10x27
309.127BR	309.127BL	12.7	57.5	27	10x27
309.13BR	309.13BL	13	57.5	27	10x27
309.14BR	309.14BL	14	57.5	27	10x27
309.15BR	309.15BL	15	57.5	27	10x27
309.16BR	309.16BL	16	57.5	27	10x27

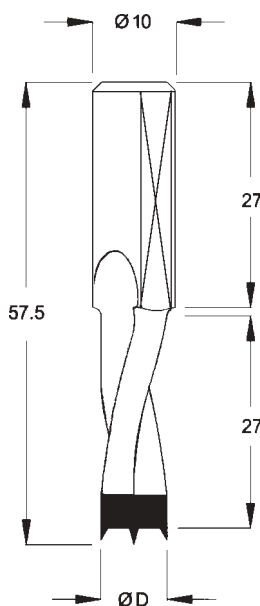

309C

Codice HW - RH	Codice HW -LH	D. mm.	L. mm.	Lu mm.	S x A mm.
309.04CR	309.04CL	4	70	35	10x30
309.05CR	309.05CL	5	70	35	10x30
309.06CR	309.06CL	6	70	35	10x30
309.63CR	309.63CL	6.35	70	35	10x30
309.07CR	309.07CL	7	70	35	10x30
309.08CR	309.08CL	8	70	35	10x30
309.09CR	309.09CL	9	70	35	10x30
309.95CR	309.95CL	9.5	70	35	10x30
309.10CR	309.10CL	10	70	35	10x30
309.11CR	309.11CL	11	70	35	10x30
309.12CR	309.12CL	12	70	35	10x30
309.127CR	309.127CL	12.7	70	35	10x30
309.13CR	309.13CL	13	70	35	10x30
309.14CR	309.14CL	14	70	35	10x30
309.15CR	309.15CL	15	70	35	10x30
309.16CR	309.16CL	16	70	35	10x30

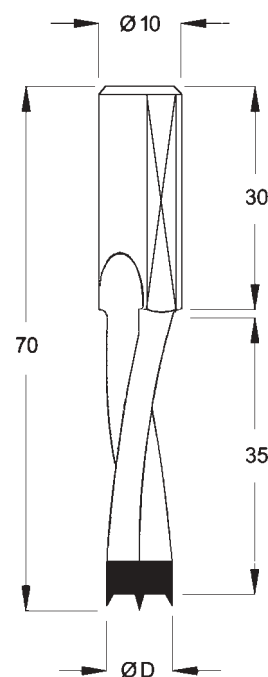

Gambo D.10 mm. con piano e vite di regolazione. Incisori ad affilatura negativa.Teflonatura di colore nero per rotazione destra e colore arancio per rotazione sinistra.

PUNTE PER FORI CIECHI

HW SPECIAL DOWELL DRILL BITS

Shank D.10 mm. with flat and adjusting screw.PTFE antiseizure coating.Special chip free negative spurs action. Black colour for right rotation -orange colour for left rotation.

309D

Codice HW - RH	Codice HW -LH	D. mm.	L. mm.	Lu mm.	S x A mm.
309.05DR	309.05DL	5	77	44	10x30
309.06DR	309.06DL	6	77	44	10x30
309.07DR	309.07DL	7	77	44	10x30
309.08DR	309.08DL	8	77	44	10x30
309.09DR	309.09DL	9	77	44	10x30
309.10DR	309.10DL	10	77	44	10x30
309.12DR	309.12DL	12	77	44	10x30



Gambo D.10 mm. con piano e vite di regolazione. Incisori ad affilatura negativa.Teflonatura di colore nero per rotazione destra e colore arancio per rotazione sinistra.

