

422 FRESA AD INSERTI PER SERRATURE

ROUTER CUTTER WITH KNIVES FOR LOCK SLOT


FRESA AD INSERTI PER CAVA SERRATURA Z=2
CORPO IN ACCIAIO SPECIALE

ROUTER CUTTER WITH KNIVES FOR LOCK SLOT Z=2
BODY WITH SPECIAL STEEL

422

CODICE	D.	L1	L2	LT	S	Z	ROTAZIONE
	mm.	mm.					

422-16	16	95	23	150	16	2	RH
--------	----	----	----	-----	----	---	----

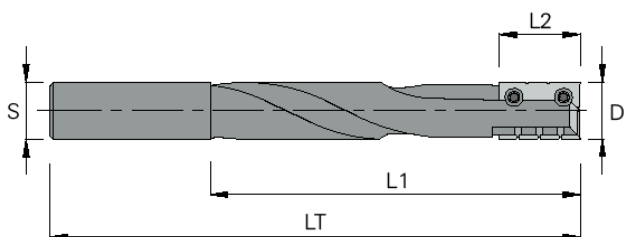

Ricambi/Spare parts

Codice nr. Dimensioni

401.06 M4 x 6 VITE/SCREW

000/039 TORX T20




422P0 23 x 7 x 1.5



422P2 23 x 7 x 1.5



422P3 23 x 7 x 1.5



427 FRESA PER RAGGIARE E SMUSSARE

CHAMFERING AND ROUNDING ROUTER WITH CYLINDRICAL SHANK D.20 X 50.

FRESA PER SMUSSARE E RAGGIARE
CON ATTACCO CILINDRICO D.20 X 50 E ROTAZIONE DX

427 n max 14000

MEC

Codice nr. HW - RH	D.	Lu	Lt	Z
	mm.	mm.	mm.	

427.40R	40	16	100	2
---------	----	----	-----	---

Ricambi - Spare parts

Codice nr. Dimensioni

27P45 45° 16x17.5x2

27P2 R2 16x17.5x2

27P3 R3 16x17.5x2

27P4 R4 16x17.5x2

27P5 R5 16x17.5x2

27P6 R6 16x17.5x2



401.06 M4 x 6

VITE /SCREW

000/039 TORX T20

