


701A FRESA IN DIAMANTE Z=2+2

ROUTER CUTTER IN PCD Z=2+2

FRESA PER FORARE E CONTORNARE
FINO 5-6 RIAFFILATURE

CUTTER IN DIA FOR DRILLING AND MILLING
REGRINDING: 5/6 TIMES

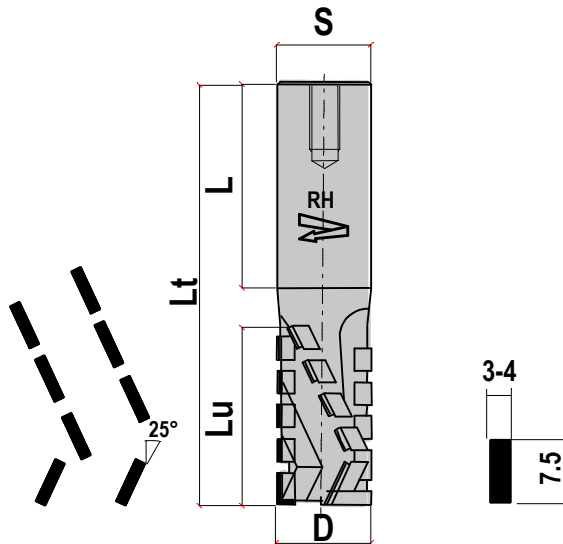

701A Z2+2 n max 18000 - 24000 **MEC**

Codice nr. DIA - RH	D. mm.	Lu mm.	Lt mm.	S.X L. mm.	Z
701A 20R	20	26	90	20x50	2+2
701A 20AR	20	35	100	20x50	2+2
701A 20BR	20	45	110	20x50	2+2
701A 20CR	20	54	115	20x50	2+2
701A 20DR	20	65	120	20x50	2+2
701A 22R	22	26	90	20x50	2+2
701A 22AR	22	35	100	20x50	2+2
701A 22BR	22	45	110	20x50	2+2
701A 22CR	22	54	115	20x50	2+2
701A 22DR	22	65	120	20x50	2+2
701A 25R	25	26	90	25x55	2+2
701A 25AR	25	35	100	25x55	2+2
701A 25BR	25	45	110	25x55	2+2
701A 25CR	25	54	115	25x55	2+2
701A 25DR	25	65	120	25x55	2+2


RH = ROTAZIONE DESTRA RIGHT ROTATION
A RICHIESTA ROTAZIONE SIN. E CODOLO D.25
ON REQUEST ROTATION LH AND SHANK D.25

701B FRESA IN DIAMANTE Z=2+2 54°

ROUTER CUTTER IN PCD Z=2+2 54°

FRESA IN DIAMANTE PER CONTORNARE
CON ANGOLO ASSIALE DI 54°, FINO 5-6
AFFILATURE

CUTTER IN DIA FOR MILLING WITH 54°
SHEAR ANGLE, REGRINDING: 5-6 TIMES

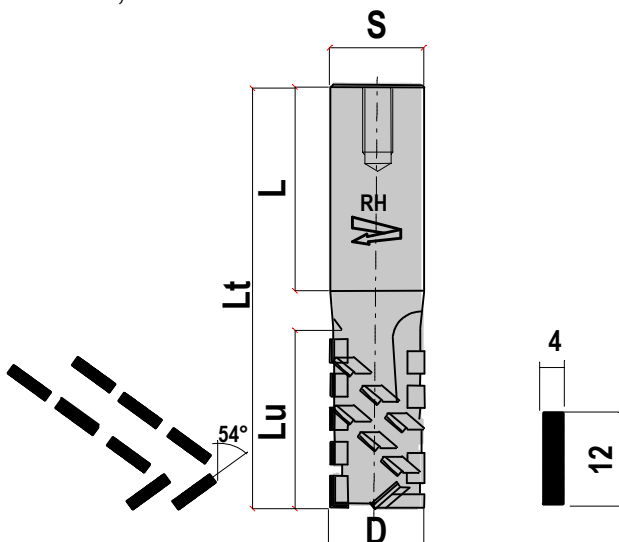

701B Z2+2 n max 18000 - 24000 **MEC**

Codice nr. DIA - RH	D. mm.	Lu mm.	Lt mm.	S.X L. mm.	Z
701B 20R	20	25	90	20x50	2+2
701B 20AR	20	36	100	20x50	2+2
701B 20BR	20	44	110	20x50	2+2
701B 20CR	20	55	125	20x50	2+2
701B 25R	25	25	90	25x55	2+2
701B 25AR	25	36	100	25x55	2+2
701B 25BR	25	44	110	25x55	2+2
701B 25CR	25	55	125	25x55	2+2
701B 30R	30	25	90	25x55	2+2
701B 30AR	30	36	100	25x55	2+2
701B 30BR	30	44	110	25x55	2+2
701B 30CR	30	55	125	25x55	2+2

RH = ROTAZIONE DESTRA RIGHT ROTATION
A RICHIESTA ROTAZIONE SINISTRA
ON REQUEST LEFT ROTATION